
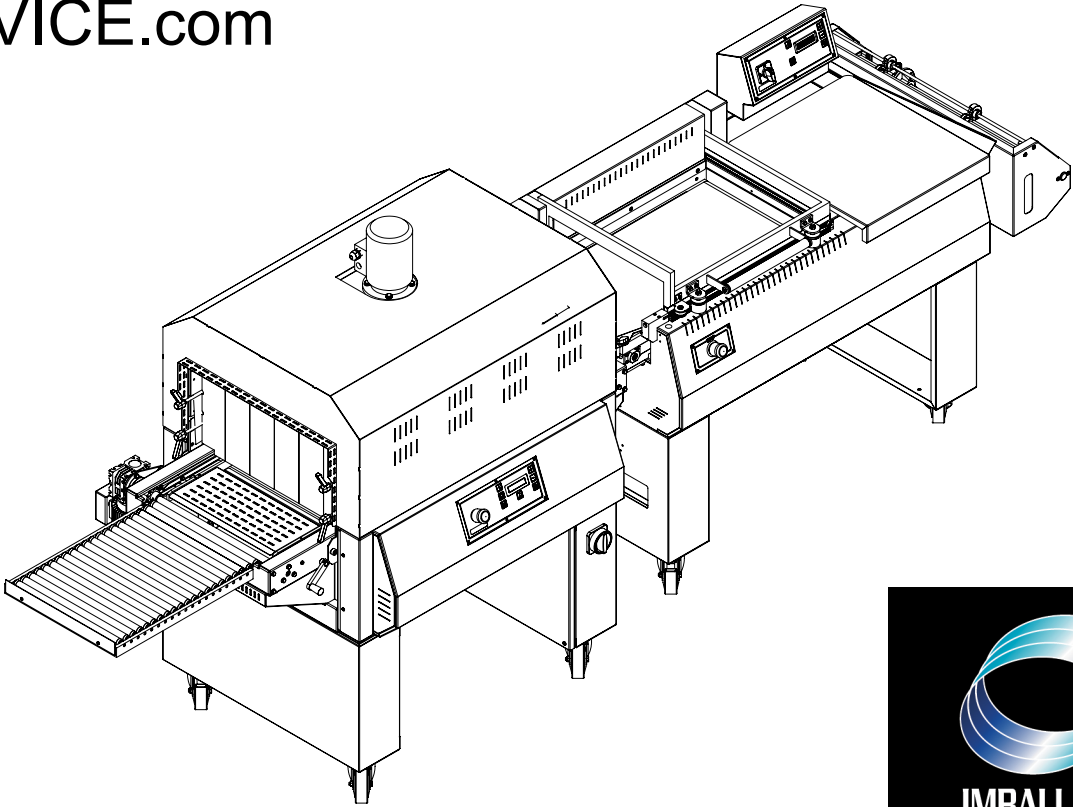


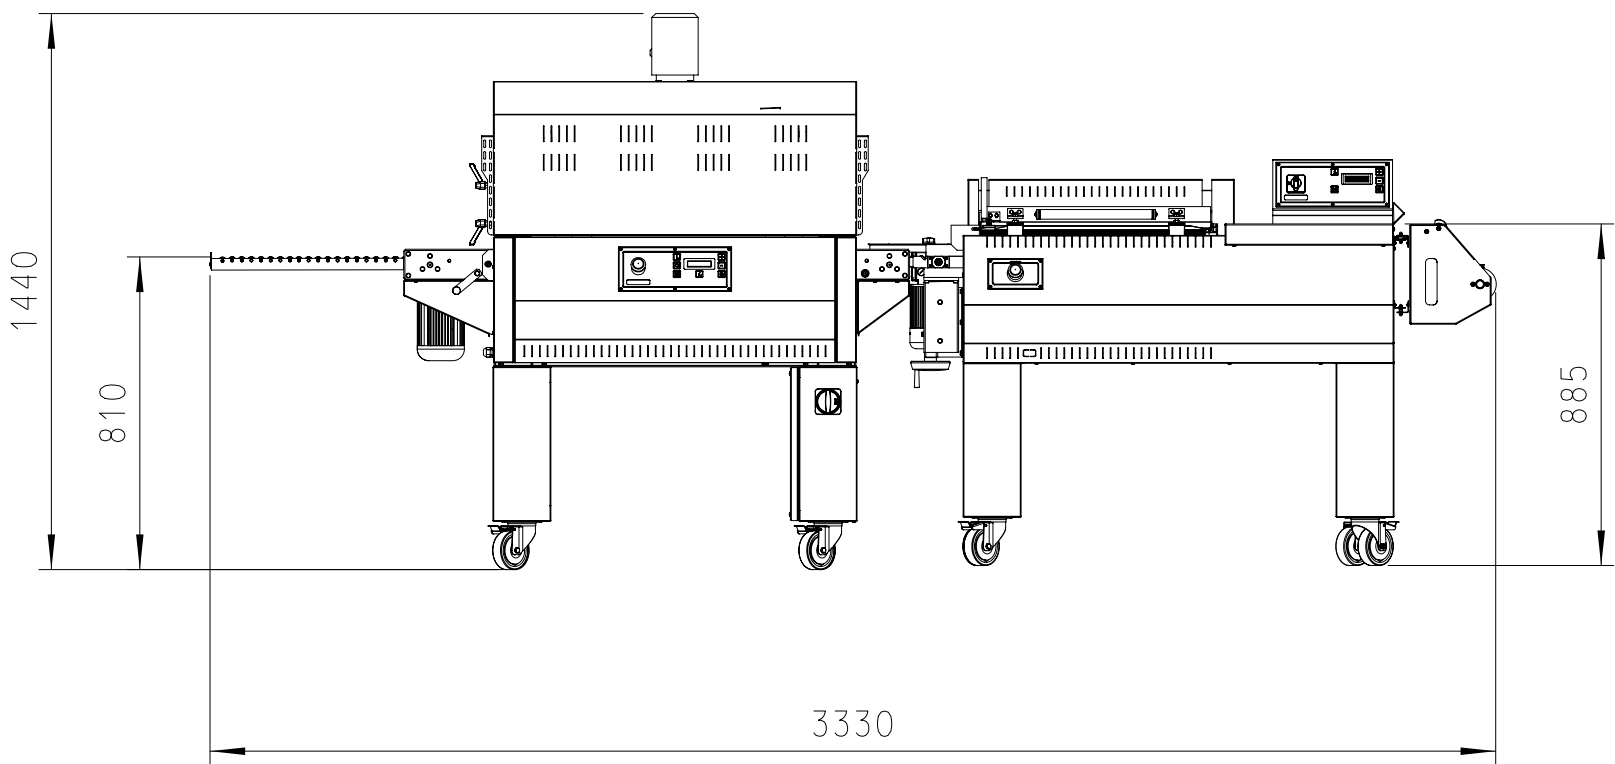

T450


TECHNICAL SPECIFICATIONS

TOTAL WEIGHT:	Kg 187
POWER SUPPLY:	380-415V 50-60 Hz 3PH+INSULATED EARTH
MACHINE INSTALLED POWER:	W 8000

FP560



TECHNICAL SPECIFICATIONS OF PRODUCT

The workable maximum format

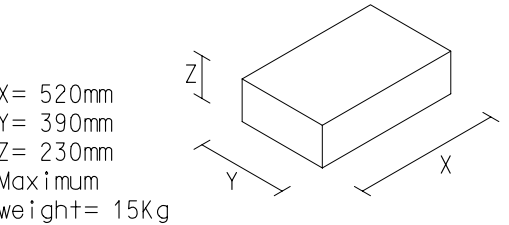


SPECIFICATIONS OF FILM REEL

Maximum reel dimensions

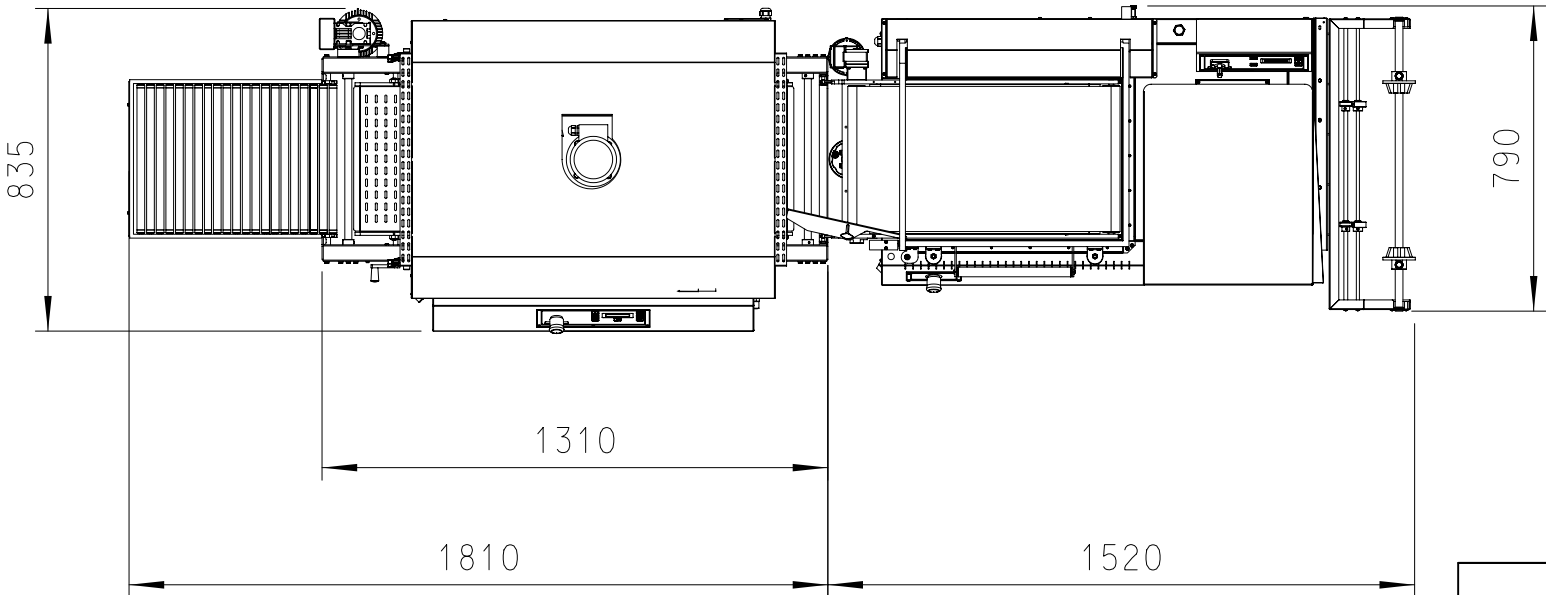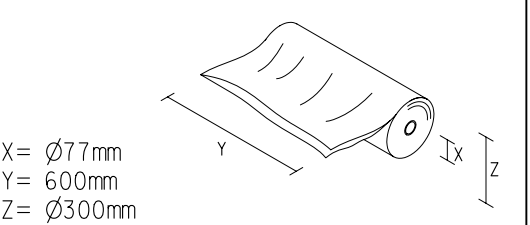

TECHNICAL SPECIFICATIONS

TOTAL WEIGHT:	Kg 129
POWER SUPPLY:	220:240V 50-60 Hz 1PH+N-INSULATED EARTH
MACHINE INSTALLED POWER:	W 2450

	Visto	Data	Firma	Scala	DENOMINAZIONE	RIFERIMENTO MODIFICA				
		04/08/06	RLAZZARI							
	MODIFICA DISEGNO									
	Firma	LSONZOGN								
	Data									
Questo disegno non puo' essere riprodotto, usato o reso noto a terzi, senza l'autorizzazione scritta della "SMI S.p.A." con riserva di agire a termini di legge .	Rif.			1:20	LAYOUT					
	Tolleranza Generale UNI EN 22768-1 Medio			Cod.vecchio:						
	dimens. da:	0	6	30	120	315	1000	2000	oltre	1°
	α:	6	30	120	315	1000	2000	4000	4000	360°
	toller. α:	0.1	0.2	0.3	0.4	0.6	1	2	3	1/3 = 20
	SMUSSI NON QUOTATI			0.5 x 45°			mm			
Tolleranze per filettature senza precisazione : vite 6g madrevite 6H					Dis.DL010325					