
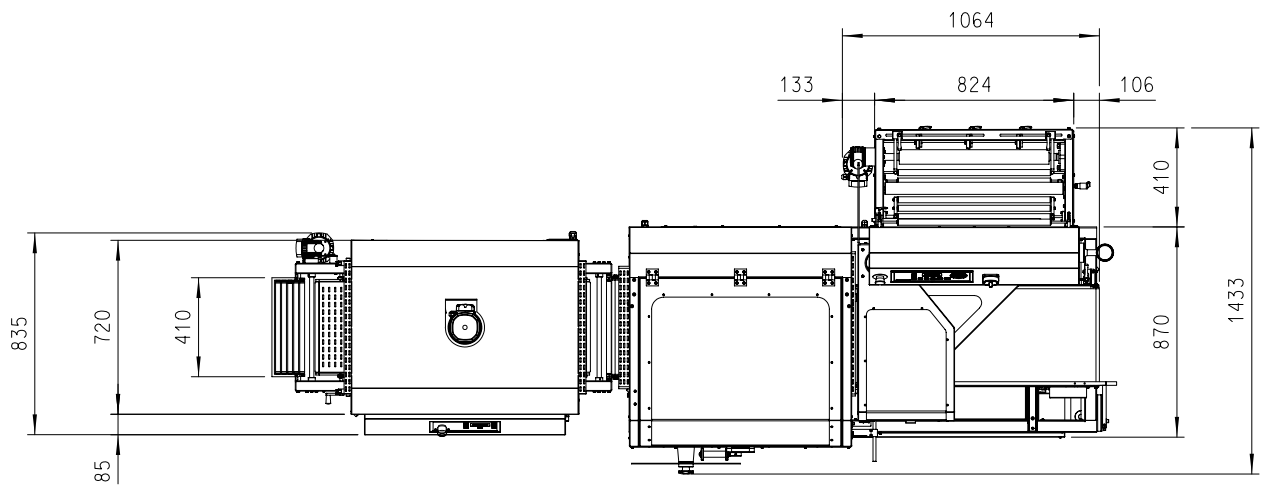
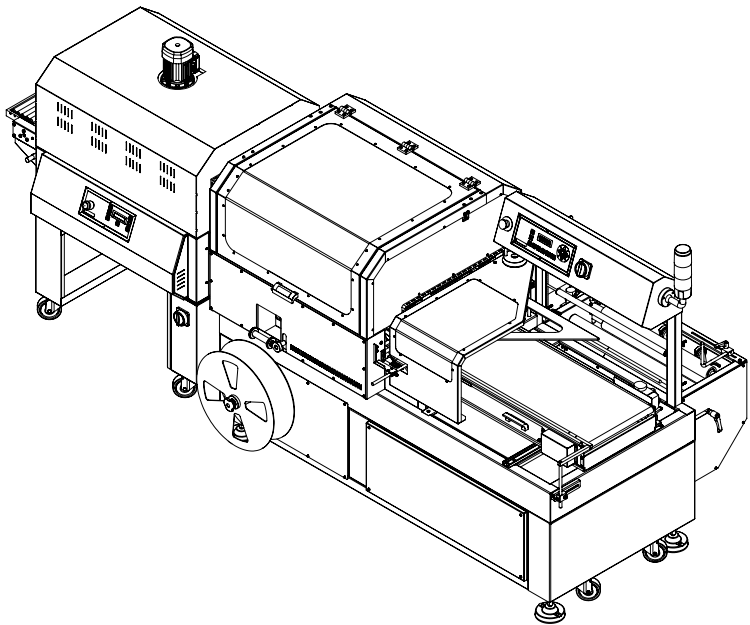
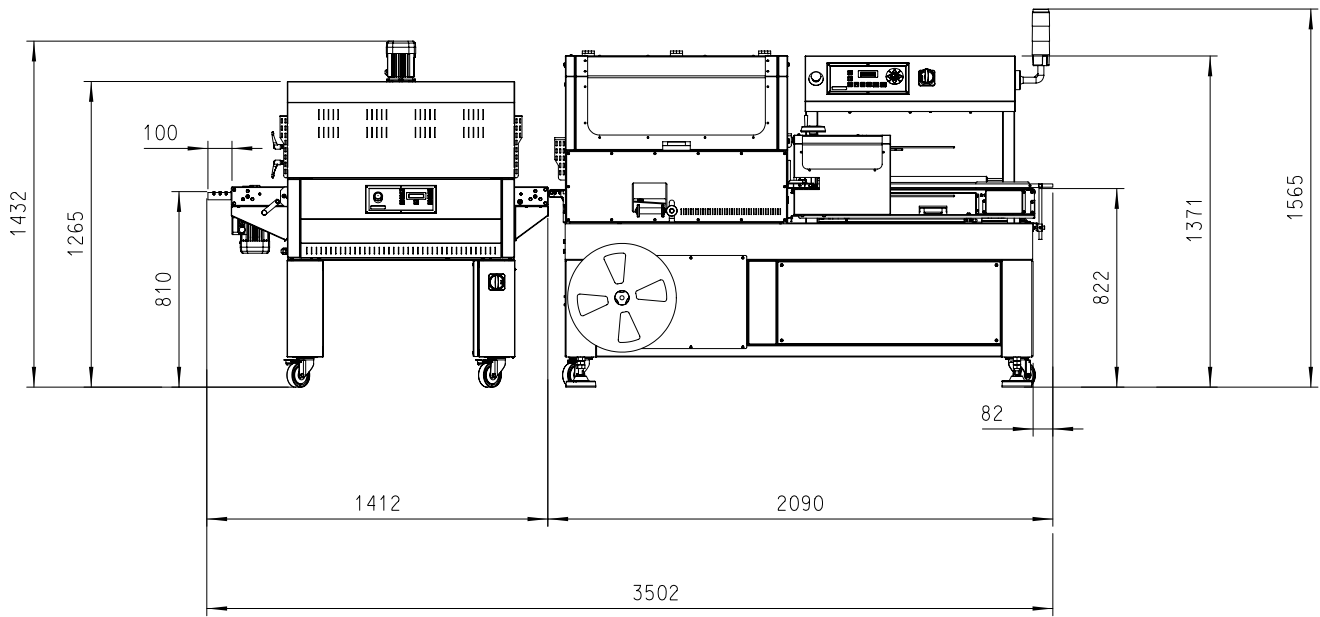





SMIPACK FP6000 + T450

TECHNICAL SPECIFICATIONS	MACHINE	SHRINKING TUNNEL
WEIGHT	430 Kg	187 Kg
POWER SUPPLY	230V 50Hz 1PH -INSULATED EARTH	380-415V 50Hz 3PH -INSULATED EARTH
MACHINE INSTALLED POWER:	2950 W	8000 W
COMPRESSED AIR INLET:	5 bar	-
PIPE CONNECTIONS:	Ø10 mm	-
CONSUMPTION	6 NI/cycle	-
THE WORKABLE FORMAT		
H= 50	X=600 mm Y=400 mm	
H= 70 mm	X=550 mm Y=390 mm	
H= 90 mm	X=500 mm Y=380 mm	
H= 110 mm	X=450 mm Y=370 mm	
H= 130 mm	X=400 mm Y=360 mm	
H= 150 mm	X=350 mm Y=350 mm	
MAX. WEIGHT FORMAT: 30 Kg.		
MAX. REEL DIMENSION		
Øi= 77 mm		
Øe= 300 mm		
L = 600 mm		

Questo disegno non può essere riprodotto, usato o reso noto a terzi, senza l'autorizzazione scritta della "SMI S.p.A." con riserva di agire a termini di legge.	Visto	Data	Firma	Scala	DENOMINAZIONE	RIFERIMENTO MODIFICA
		25/07/07	RLAZZARI			
	MODIFICA DISEGNO			Tavola		
	Firma					
	Data					
	Rif.			1/1	Dis. DL010347	