
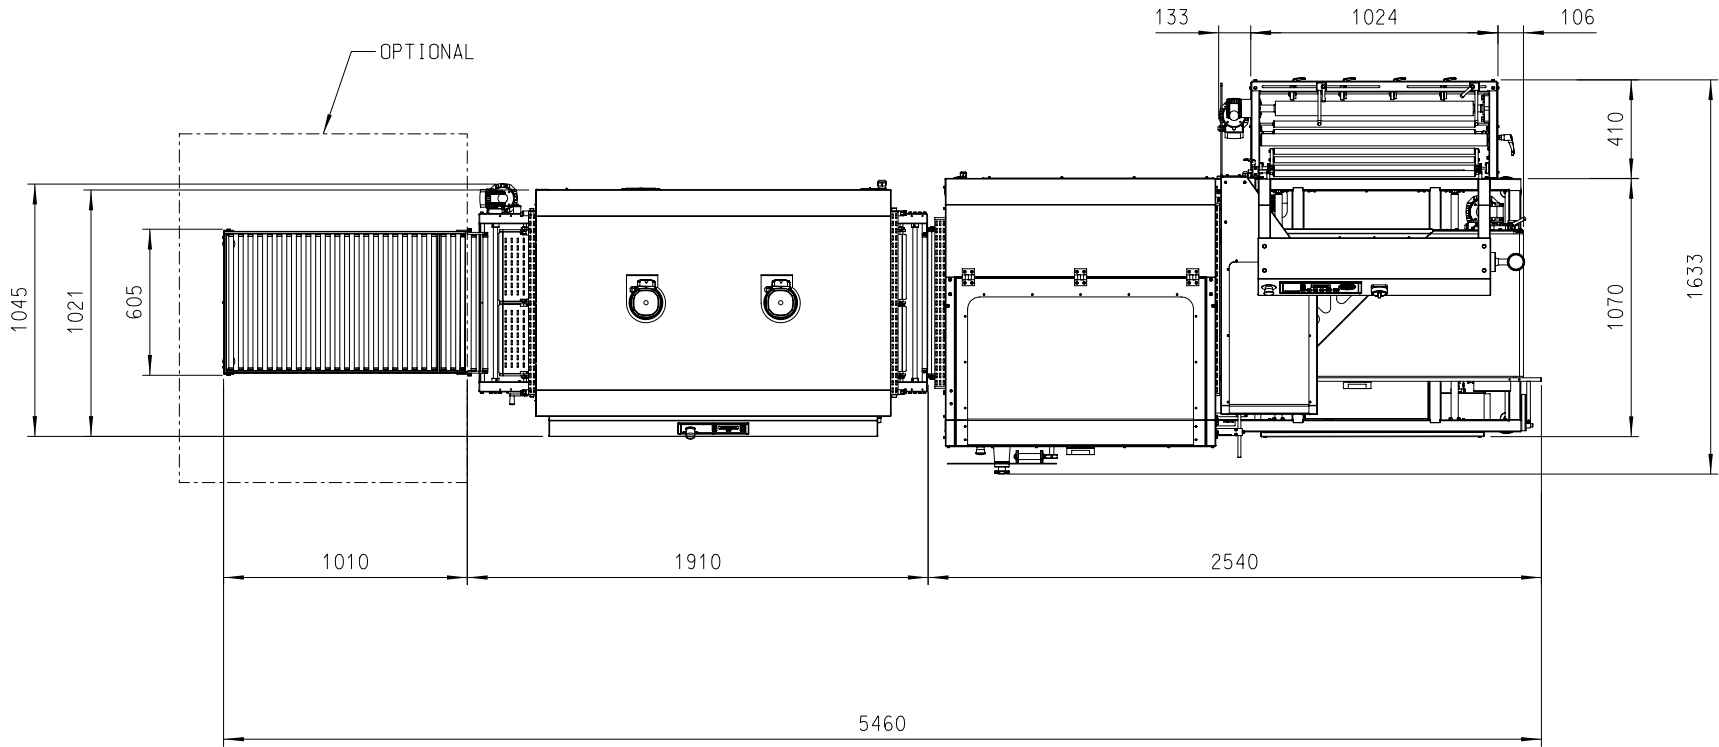
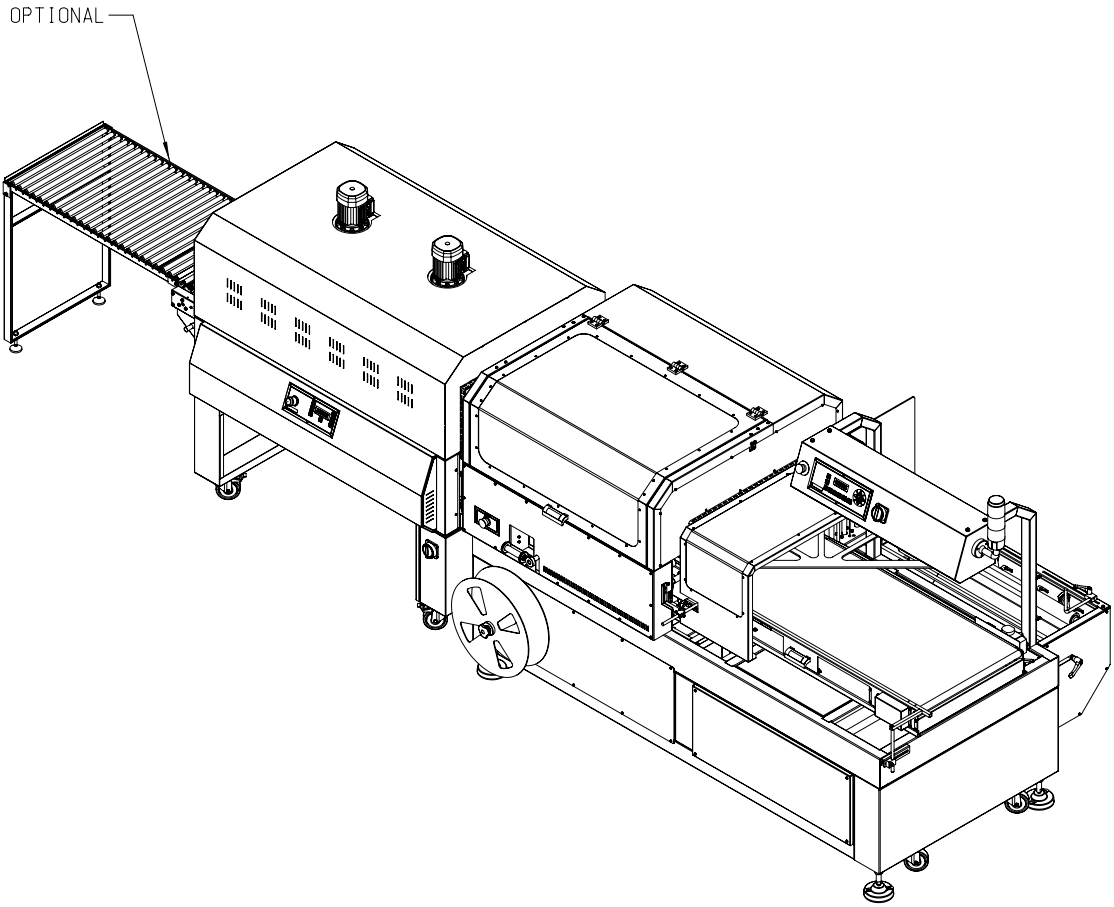


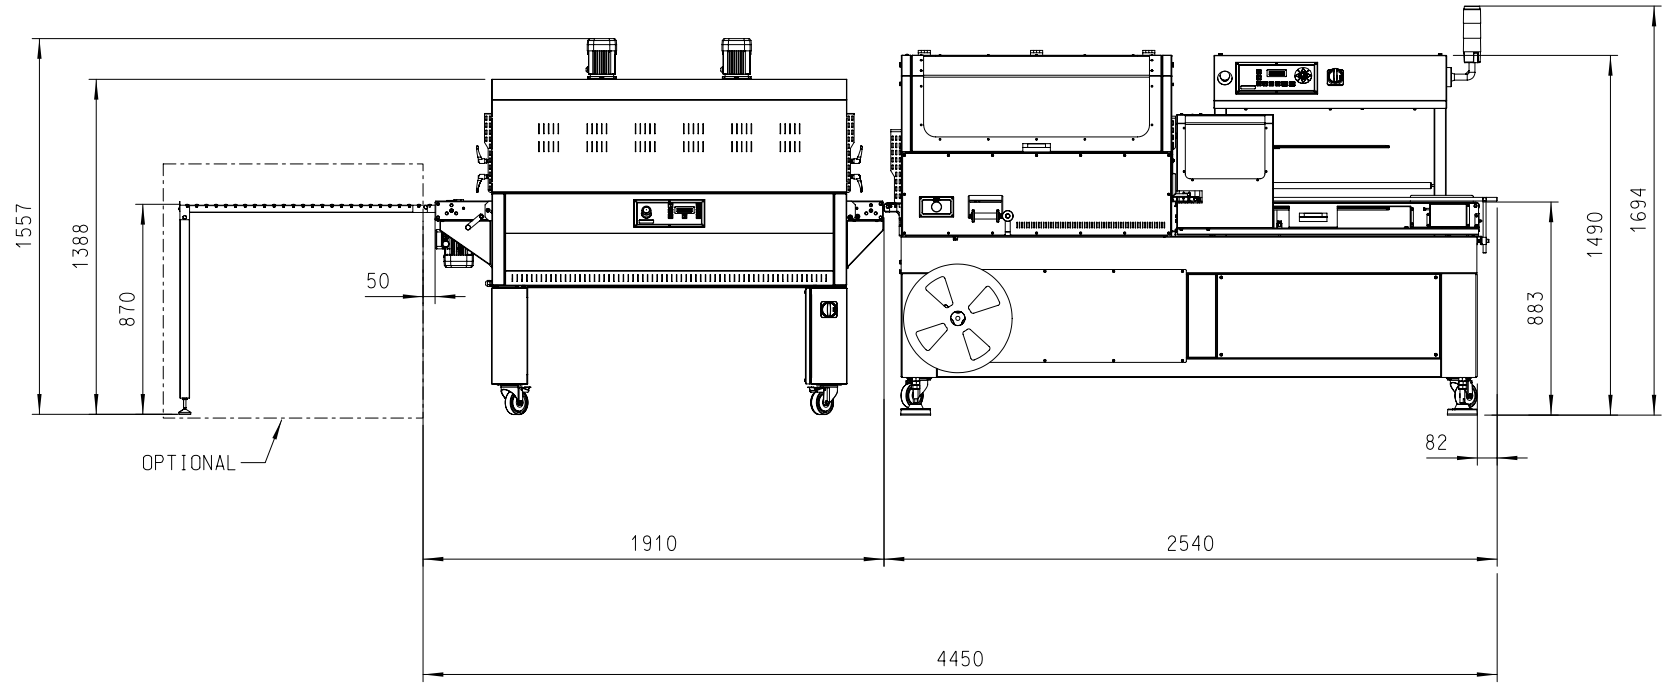


SMIPACK FP8000 CS + T650

TECHNICAL SPECIFICATIONS	MACHINE	SHRINKING TUNNEL
WEIGHT	720 Kg	350 Kg
POWER SUPPLY	230V 50Hz 1PH -INSULATED EARTH	380-415V 50-60Hz 3PH-INSULATED EARTH
MACHINE INSTALLED POWER:	3850 W	15800 W
COMPRESSED AIR INLET:	5 bar	-
PIPE CONNECTIONS:	Ø10 mm	-
CONSUMPTION	8.5 NI/cycle	-

THE WORKABLE FORMAT


H= 50	X=800 mm	Y=600 mm
H= 70 mm	X=730 mm	Y=580 mm
H= 90 mm	X=710 mm	Y=560 mm
H= 110 mm	X=690 mm	Y=540 mm
H= 130 mm	X=670 mm	Y=520 mm
H= 150 mm	X=650 mm	Y=500 mm
H= 170 mm	X=630 mm	Y=480 mm
H= 190 mm	X=610 mm	Y=460 mm
H= 210 mm	X=590 mm	Y=440 mm
H= 230 mm	X=570 mm	Y=420 mm
H= 250 mm	X=550 mm	Y=400 mm



MAX. WEIGHT FORMAT: 30 Kg.

MAX. REEL DIMENSION

Øi= 77 mm
Øe= 300 mm
L = 800 mm



Visto	Data	Firma	Scala	DENOMINAZIONE	RIFERIMENTO
	24/07/07	RLAZZARI		LAYOUT	MODIFICA
		MODIFICA DISEGNO			
	Firma				
	Data				
	Rif.				
Questo disegno non può essere riprodotto, usato o reso noto a terzi, senza l'autorizzazione scritta della "SMI S.p.A." con riserva di agire a termini di legge.			Tavola	Dis. DL010344	
			1/1		