
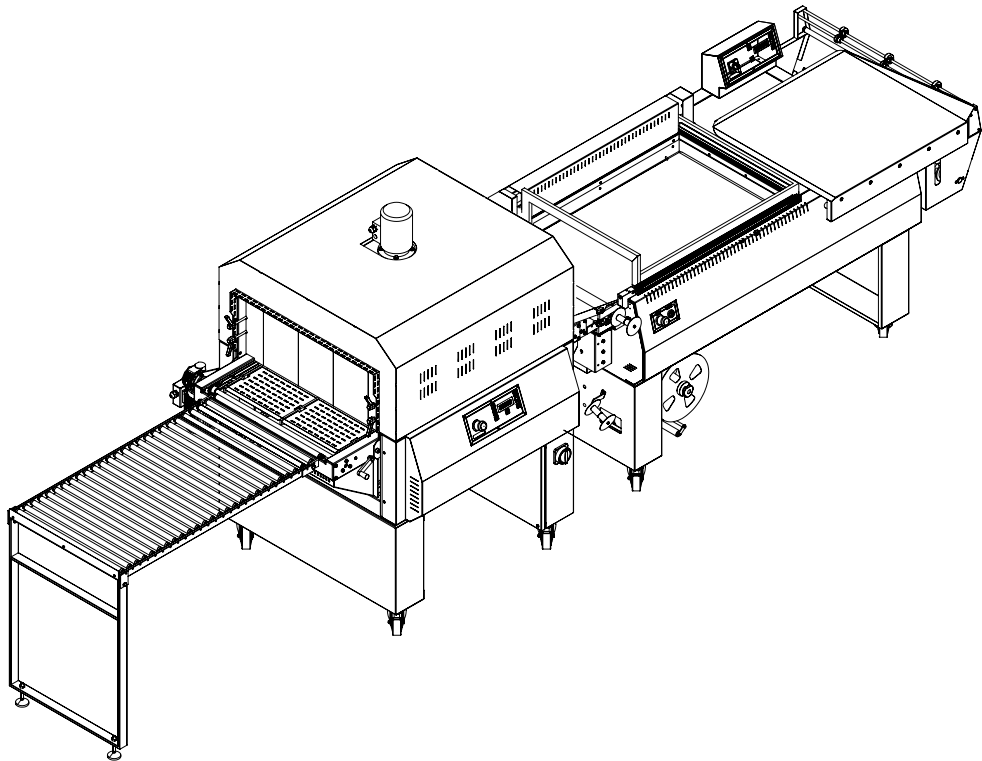


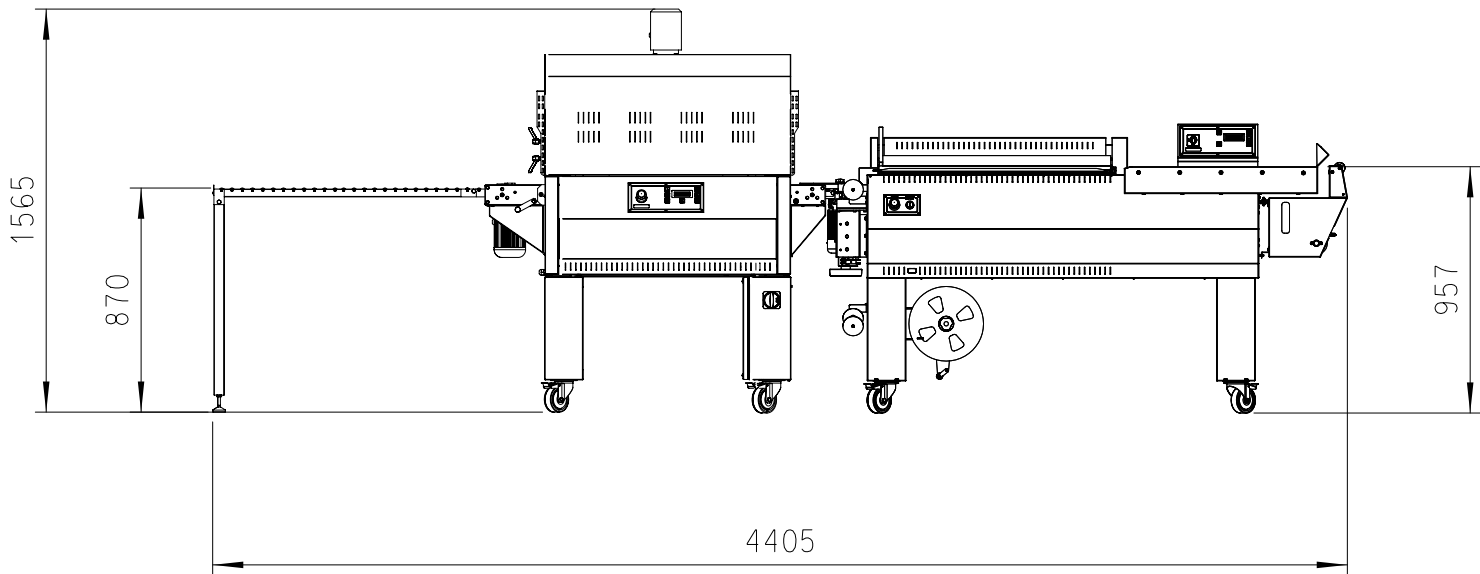

T650 E


TECHNICAL SPECIFICATIONS

TOTAL WEIGHT:	Kg 241
POWER SUPPLY:	380-415V 50-60 Hz 3PH+INSULATED EARTH
MACHINE INSTALLED POWER:	W 9500

FP870 A


TECHNICAL SPECIFICATIONS OF PRODUCT

The workable maximum format

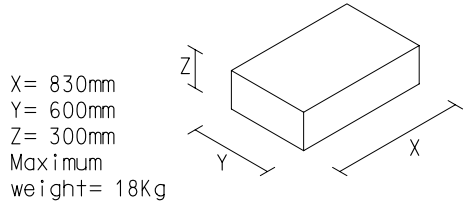


SPECIFICATIONS OF FILM REEL


Maximum reel dimensions

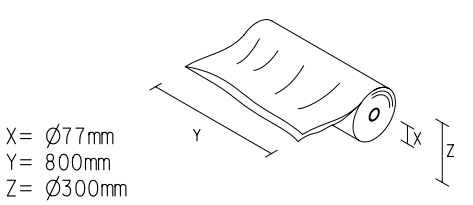

TECHNICAL SPECIFICATIONS

TOTAL WEIGHT:	Kg 247
POWER SUPPLY:	220-240V 50-60 Hz 1PH+N-INSULATED EARTH
MACHINE INSTALLED POWER:	W 3100

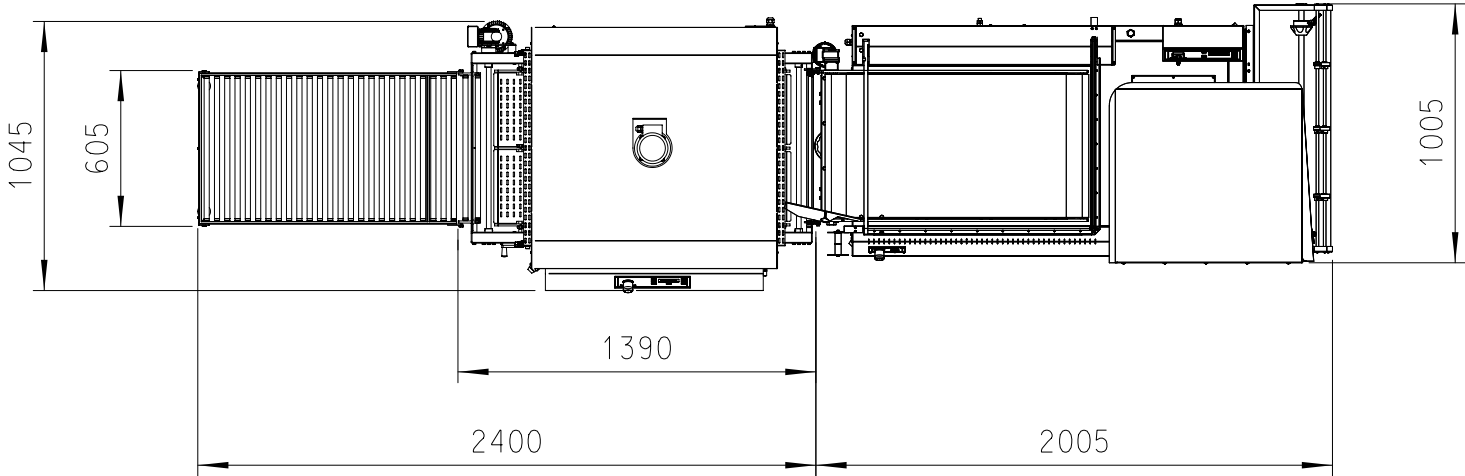

	Visto	Data	Firma	Scala	DENOMINAZIONE	RIFERIMENTO MODIFICA		
		04/08/06	RLAZZARI					
	MODIFICA DISEGNO							
	Firma							
	Data			1:30	LAYOUT			
	Rif.							
	Tolleranza Generale UNI EN 22768-1 Medio							
	Cod. vecchio:							
Questo disegno non puo' essere riprodotto, usato o reso noto a terzi, senza l'autorizzazione scritta della "SMI S.p.A." con riserva di agire a termini di legge .								
	Tolleranze per filettature senza precisazione : vite 6g madrevite 6H					Dis. DL010324		
	dimens. da:							
	α:							
	toler. α:							
SMUSSI NON QUOTATI 0.5 x 45° mm								